


WIDE-SPREAD FLOODING WILL EXIST IN THE FLOOD PLAIN UPSTREAM FROM THE WHITTIER NARROWS DAM RESERVOIR DUE TO EXTREMELY HIGH INFLOWS.

WIDE-SPREAD FLOODING WILL EXIST DOWNSTREAM WITH OUTLET WORKS USE. DETAILED HYDRAULIC STUDIES WILL BE ACCOMPLISHED TO DEFINE THE FLOODING LIMITS.

WIDE-SPREAD FLOODING WILL EXIST DOWNSTREAM WITH SPILLWAY USE. DETAILED HYDRAULIC STUDIES WILL BE ACCOMPLISHED TO DEFINE THE FLOODING LIMITS.

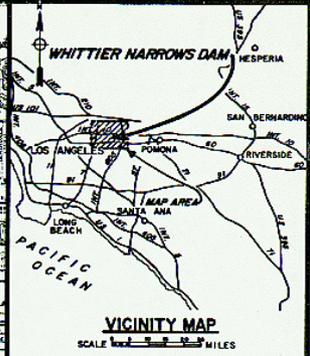

LEGEND

 Limit of reservoir due to pool at top of dam elev. 259.0 feet NGVD.



Center interval 20 feet
National Geodetic Vertical Datum of 1929
Source of base map: U. S. Geological Survey
7.5 minute series

NOTE: The Inundated area upstream of the dam, shown on this map, reflects the results of the use of the project under an extremely remote flood condition.

U. S. ARMY ENGINEER DISTRICT, LOS ANGELES
CORPS OF ENGINEERS
LOS ANGELES, CALIFORNIA

**WHITTIER NARROWS DAM
UPSTREAM RESERVOIR
INUNDATION MAP**